


4071 Series

Wafer 2.54mm(0.100")

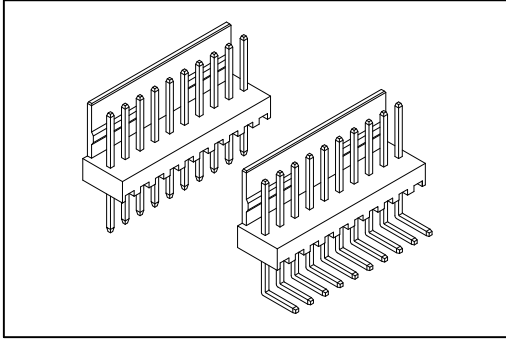

Material:







Housing: Nylon 66 Flame Retardant UL94V-2.
Contacts: Brass.

Electrical Characteristics:

Current Rating: 2 A.
Dielectric Withstanding Voltage: AC 1000V.
Insulator Resistance: 1000MΩ min.
Contact Resistance: 20mΩ max.
Operating Temperature: -25°C~+85°C.

Features:

- * Available in Single row 2 through 20 position.
 - * 0.64mm(0.025") tin plated posts.
 - * Side-to-side and end-to-end stackable.
- Mates with: 4071 housing.

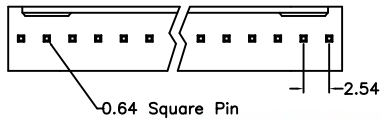

Position	Dimension	
	A	B
2	2.54	5.12
3	5.08	7.66
4	7.62	10.20
5	10.16	12.74
6	12.70	15.30
7	15.24	17.94
8	17.78	20.48
9	20.32	23.02
10	22.86	25.58
11	25.40	28.12
12	27.94	30.68
13	30.48	33.10
14	33.02	35.80
15	35.56	38.34
16	38.10	40.94
17	40.64	43.30
18	43.18	45.90
19	45.72	48.56
20	48.26	50.80

Ordering information

4071-
Series

20
No. of Position

T
T: Tin Plated

S
S: Straight
R: Right Angle
L: Left Angle

B
B: Bulk Package