


4771 Series

Wafer 3.96mm(0.156")

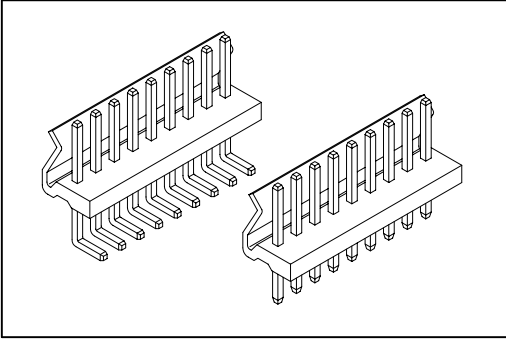

Material:

Housing: Nylon 66 Flame Retardant UL94V-2.

Contacts: Brass.

Electrical Characteristics:

Current Rating: 7 A.

Dielectric Withstanding Voltage: AC 1000V.



Insulator Resistance: 1000MΩ min.

Contact Resistance: 20mΩ max.

Operating Temperature: -25°C~+85°C.

Features:

- * Available in Single row 2 through 20 position.
 - * 1.14mm(0.045") tin plated posts.
 - * Side-to-side and end-to-end stackable.
 - * Locking feature optional.
- Mates with: 4771 Housing.

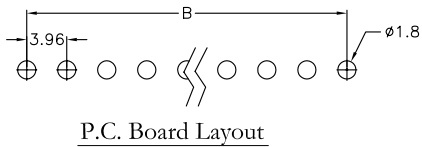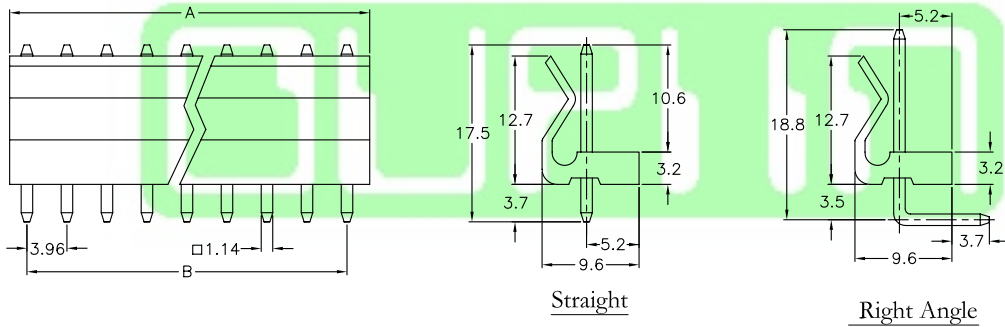

Position	2 Thru 20
Dimension	
A	3.96 X No. of Positions
B	3.96 X No. of Positions -3.96

Ordering information

4771-
Series

20
No. of Position

T
T: Tin Plated

S
S: Straight
R: Right Angle

B
B: Bulk Package